


PJG-450

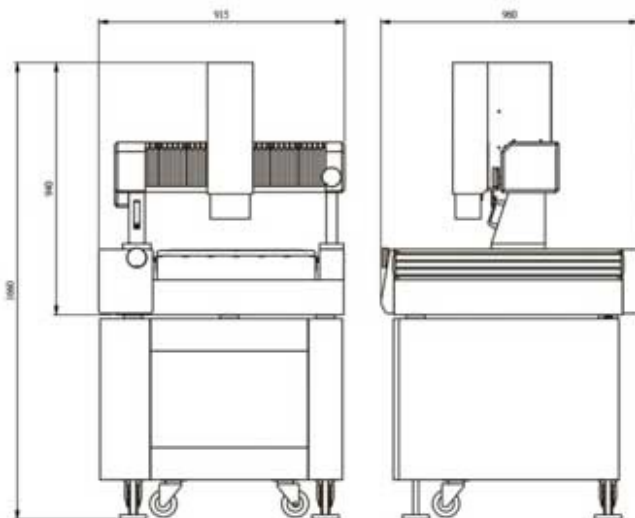

規格 SPECIFICATION	PJG-450DV-PC	PJG-450DV-CNC
量測範圍 MEASURING RANGE	430 x 420 x 100 mm(X,Y,Z)	430 x 420 x 100 mm(X,Y,Z)
解析讀數 RESOLUTION	0.001mm in 2 Axes (二軸)	0.001mm in 3 Axes (三軸)
量測軟體 SOFTWARE	MSU3D Pro	IK5000-VED-CNC-AF
影像系統 VISION	Color CCD + Zoom	Color CCD + Zoom
放大倍率 ZOOM	10X ... 100X (Option 20X ~ 200X)	10X ... 100X (Option 20X ~ 200X)
表面燈源 SURFACE LIGHT	White LED (Option of Coaxial LED)	White LED (Option of Coaxial LED)
輪廓底光 CONTOUR LIGHT	Green LED	Green LED
量測精度 ACCURACY	U1= 4 + L/200 um ; U2= 6 + L/150 um	U1= 4 + L/200 um ; U2= 6 + L/150 um
單點重複精度 REPEATABILITY	0.003 mm	0.003 mm
傳動方式 TRANSMISSION	Linear Guideway + Rolling Drive Nut 無牙螺桿 + 線性滑軌	Linear Guideway + Rolling Drive Nut 無牙螺桿 + 線性滑軌
操作方式 OPERATION	Manual 手動 / Bridge Type	CNC Programmable 程序控制
驅動方式 DRIVE		Servo Motors + Joystick
花崗石平臺 GRANITE TABLE	DIN. 876, 0 GRADE (Glass 485 x 485 mm)	DIN. 876, 0 GRADE (Glass 485 x 485 mm)
工件限高 DEMO-PARTS HEIGHT	100 mm	100 mm
工作限重 DEMO-PARTS WEIGHT	20 kgs	20 kgs
外型尺寸 DIMENSION	110 x 100 x 195 cm (Including Base Stand)	110 x 100 x 195 cm (Including Base Stand)
外型尺寸 - 包括週邊 DIMENSION	190 x 100 x 195 cm (Including Deluxe Table)	190 x 100 x 195 cm (Including Deluxe Table)
機器重量 MACHINE WEIGHT	550 kgs	580 kgs
電腦硬體 HARDWARE	PC + 20" Monitor + WIN-PRO	PC + 24" Monitor + WIN-PRO
選購配備 OPTION	ND1200 DRO + 20" Monitor + Cross-Hair	Light-Control or Auto-Zoom 程式控制調光或倍率調整
選購配備 OPTION	M3 量測軟體 SOFTWARE, IK5000	With Renishaw Trigger Probe MCP 簡易式測頭